


Carpet Tile

Millbrook

Specifications:

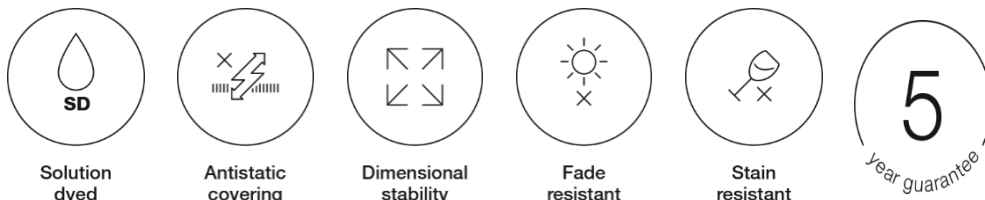

Construction -	Multi-Level Loop Pile – Arrow, Bedford, Fox Level Loop Pile - Manse	
Fibre -	Solution Dyed PP	
Gauge -	1/10" – Manse, 1/12" – Arrow, Bedford, Fox	
Pile weight -	16 oz/yd ² Manse, 18 oz/yd ² - Arrow, 19 oz/yd ² - Fox, 21 oz/yd ² - Bedford	
Average pile height -	3.5 mm, ± 5%	
Backing -	PVC with Fibreglass	
Tile size -	50 cm x 50 cm	
Installation method -	Quarter Turn Only	
Anti-static AATCC134 -	≤3.5 kV	Pass
Wear tests		
Rubbing / Crocking AATCC165	4 – 5	Pass
Stability		
Delamination ASTM D3936 -	No Separation	Pass
Dimensional stability AACHEN -	≤ 0.2	Pass
Warranties -	5 Year Limited Wear 5 Year Limited Backing Integrity 5 Year Limited Edge Ravel 5 Year Limited Dimensional Stability 5 Year Limited Static Protection	

- Warranties are extended to the original purchaser of the product only and are not transferable.
- All product specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product specifications may change without notice as long as product performance is not materially affected.
- Must be laid in accordance with AS/NZ installation standards.
- We recommend the use of protective chair pads under office chairs with roller casters to protect the appearance retention of the product and to avoid excessive wear in these areas.

Please contact us on 03 366 9839 to request any samples or other product details.

international
flooring solutions

p 03 366 9839 e office@robertmalcolm.co.nz
10 Establishment Drive, PO Box 914, Christchurch 8140, New Zealand
robertmalcolm.co.nz



robert malcolm

